

慈溪市乐诺照明科技有限公司

CIXI LEONLUX TECHNOLOGY CO., LTD

ADD: NO.36 Xujia,Yiyuan Village, Zonghan Street, Cixi 315300, China

TEL: +86 152 5789 1002

FAX: +86 574 6321 0667

E-mail: manfred@leonlux.net lemon@leonlux.net

<http://www.leonlux.net>

2017-2018

leonlux®

BSCI

ISO9001



COMPANY PROFILE

WELCOME TO JOINING US!



CIXI LEONLUX
TECHNOLOGY CO., LTD

Welcome to Cixi Leonlux Technology Co.,Ltd

Leonlux is a leading manufacturer of interior and exterior LED lighting products, and has earned high reputation for supplying quality product at competitive prices. Continual product development and updates in legislation allows Leonlux to be at the forefront by offering the latest technology, particularly in LED lighting, creating a recognised and trusted brand that is now being supplied around the world. Almost of products have got the GS/LVD/EMC/RoHS/PAHs/REACH from TÜV SÜD. And we also apply for the ErP(874/2012) under the new policy of Europe. UL/cUL/ETL/Lighting fact are available for North America. Welcome to joining us!
Best regards!
Managing Director: Leyi

www.leonlux.net



1. IES TEST
2. INTEGRATING SPHERE
3. SALTY TEST
4. IPX4 TEST
5. IPX5 TEST
6. EMC TEST
7. LIGHTNING SURGE GENERATOR
8. ELECTROSTATIC DISCHARGE GENERATOR
9. HIGH-LOW TEMPERATURE TEST

NEW LED WORKLIGHT



Portable Hand




Outlet socket



Clip



ON/OFF switch

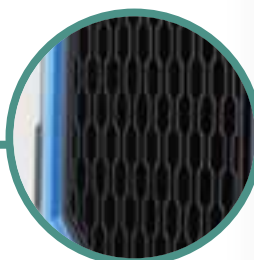

Heat sink



Practical hard rubber strap

99A FOLDING WORKLIGHT SERIES

FEATURES

- Plastic body with TPE rubber coating
- With anti-glare diffused lens for wide spread
- LED: SMD2835
- With 2 pcs of outlet socket
- With 1.8m cable + plug.
- With super-touch ON-OFF switch
- Voltage: 110 - 130V / 220 - 240V, 50/60Hz



IK08



IP54




Work at
Severe environment



Item No.: 99A15 (2 x 15W)

Item No.: 99A30 (2 x 30W)

Item No.: 99A50 (2 x 50W)



Opens out to 290°

99R FOLDING RECHARGEABLE SERIES

FEATURES

- Plastic body with TPE rubber coating
- With anti-glare diffused lens for wide spread
- LED: SMD2835
- With Built-in Li-battery
- With super touch switch + LED battery indicator



Item No.: 99R10 (2 x 10W)
Item No.: 99R20 (2 x 20W)
Item No.: 99R30 (2 x 30W)



IK08




IP54



Work at
Severe environment



Replaceable battery



Be dimmable without steps.



Charging port



super touch switch
LED battery indicator



USB output

99C FOLDING WITH TRIPOD

FEATURES

- 99A folding worklight with umbrella-type tripod
- Item No.: 99AC15 (2 x 15W)
- Item No.: 99AC30 (2 x 30W)
- Item No.: 99AC50 (2 x 50W)
- 99R folding rechargeable with umbrella-type tripod
- Item No.: 99RC10 (2 x 10W)
- Item No.: 99RC20 (2 x 20W)
- Item No.: 99RC30 (2 x 30W)




IK08



IP54



Work at
Severe environment

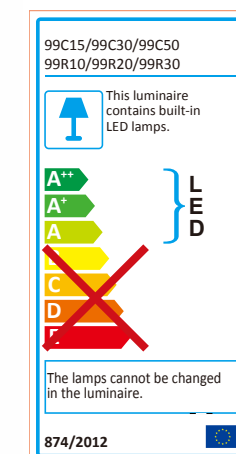

STAINLESS STEEL DURABLE WORKLIGHT



CIXI LEONLUX
TECHNOLOGY CO., LTD

92 STAINLESS STEEL WORKLIGHT SERIES

FEATURES


- **Stainless Steel body**
- LED: SMD2835
- With 2 pcs of outlet socket
- With 1.8m cable + plug.
- With super-touch ON-OFF switch
- Voltage: 110 - 130V / 220 - 240V, 50/60Hz



IP54



- Item No.: 92A10 (100W)
- Item No.: 92A08 (80W)
- Item No.: 92A06 (60W)
- Item No.: 92A05 (50W)

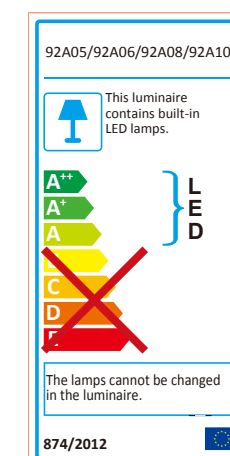

MULTI-FUNCTION

98 SERIES

98A WORKLIGHT SERIES

FEATURES

- Plastic body with TPE rubber coating + PC cover
- LED: SMD2835
- 1.With built-in heat sink
- 2.With 2pcs of outlet socket (Max output: 3000W)
- 3.With 1.8m cable + plug.
- 4.Cable can be winding around the lamp
- 5.With plug clip
- 6.With 4 levels of foldable bracket
- 7.With super touch ON-OFF switch
- IP54



IK08



IP54



Work at
Severe environment



Item No.: 98A03 (30W)

Item No.: 98A05 (50W)



Socket Optional



Bluetooth / loudspeaker



USB output



Practical hard rubber strap



Cable can be winding
around the lamp



4 levels Foldable bracket

MULTI-FUNCTION



98R RECHARGEABLE SERIES

FEATURES

- Plastic body with TPE rubber coating + PC cover
- LED : SMD2835
- With super touch switch + LED battery indicator
- With 5V 1A USB output
- With adaptor
- Adaptor can be put in the lamp to avoid missing.
- With integrated magnet on the bracket
- With 4 levels of foldable bracket
- IP54



Item No.: 98R01 (10W)

Item No.: 98R02 (20W)

Item No.: 98R03 (30W)

Item No.: 98R05 (50W)



super touch switch
LED battery indicator



space for adaptor



Practical hard rubber strap



IK08



IP54



Work at
Severe environment



Integrated magnet



Replaceable battery

98C SINGLE WITH TRIPOD

FEATURES

- Plastic body with TPE rubber coating ,IK08
- With transparent PC cover
- With umbrella-type tripod
- With 3m cable + plug.
- LED : SMD2835
- 110 - 130V / 220 - 240V, 50/60Hz
- IP54



Item No.: 98C03 (30W)

Item No.: 98C05 (50W)




IK08



IP54



Work at
Severe environment

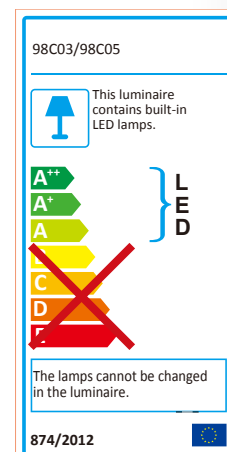

98C TWIN WITH TRIPOD

FEATURES

- Plastic body with TPE rubber coating ,IK08
- With transparent PC cover
- With umbrella-type tripod
- With 3m cable + plug.
- LED : SMD2835
- 110 - 130V / 220 - 240V, 50/60Hz
- IP54



Item No.: 98C03-2 (2 x 30W)

Item No.: 98C05-2 (2 x 50W)




IK08



IP54





Work at
Severe environment

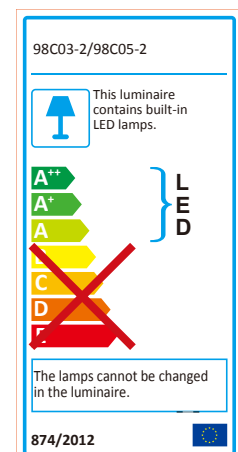

90B03-2S

FEATURES

- Die-casting aluminium body + clear glass
- With foldable portable stand
- LED: SMD2835
- Watt: 30W, Lumen: 2400lm
- With 2PCS of outlet sockets
- With super touch ON-OFF switch
- With 1.8m cable + plug.
- 110 - 130V / 220 - 240V, 50/60Hz
- IP54

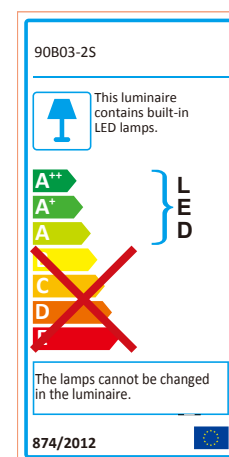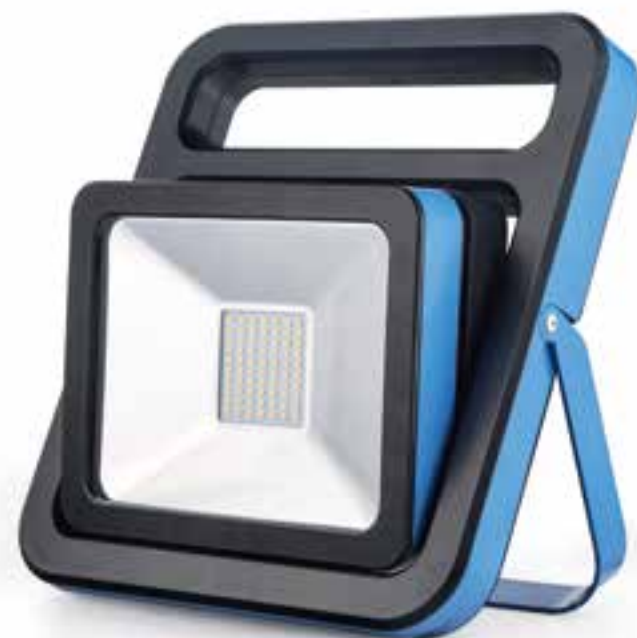

USB output



output socket




Bluetooth / loudspeaker

90B05-2S/3S

FEATURES

- Die-casting aluminium body + clear glass
- With foldable portable stand
- LED: SMD2835
- Watt: 50W, Lumen: 4000lm
- With 2 / 3PCS of outlet sockets
- With super touch ON-OFF switch
- With 1.8m cable + plug.
- 110 - 130V / 220 - 240V, 50/60Hz
- IP54

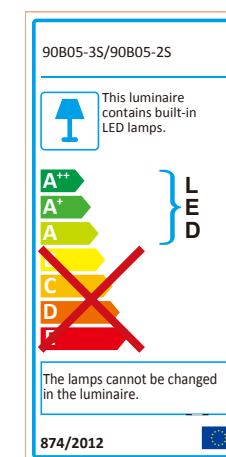

USB output



output socket




Bluetooth / loudspeaker

90B ISPOT WORKLIGHT SERIES

FEATURES

- Die-casting aluminium body + clear glass
- With foldable portable stand
- LED: SMD2835
- With 1.5m cable + plug.
- 110 - 130V / 220 - 240V, 50/60Hz
- IP65

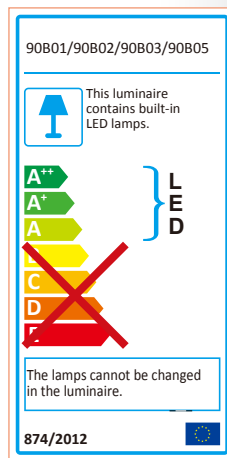

Item.	Watt	Lumen	LED Type	CRI	PF	CCT
90B01	10W	800LM	SMD2835	>80Ra	≥98%	3000-6500K
90B02	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K
90B03	30W	2400LM	SMD2835	>80Ra	≥98%	3000-6500K
90B05	50W	4000LM	SMD2835	>80Ra	≥98%	3000-6500K

90B WITH TRIPOD

FEATURES


- Die-casting aluminium body + clear / frosted glass
- With foldable portable stand
- With umbrella-type tripod
- LED: SMD2835
- With 3m cable + VDE plug.
- 110 - 130V / 220 - 240V, 50/60Hz
- IP54



90A 01/02/03/05

FEATURES

- Die-casting aluminium body + clear / frosted glass
- LED: SMD2835
- 220-240V, 50Hz
- IP65

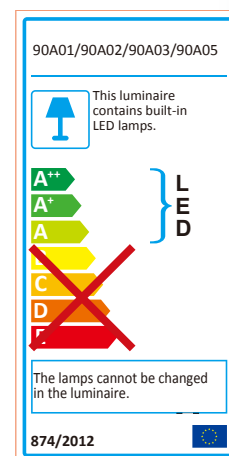


Item.	Watt	Lumen	LED Type	CRI	PF	CCT
90A01	10W	800LM	SMD2835	>80Ra	≥98%	3000-6500K
90A02	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K
90A03	30W	2400LM	SMD2835	>80Ra	≥98%	3000-6500K
90A05	50W	4000LM	SMD2835	>80Ra	≥98%	3000-6500K

90A 01S/02S/03S/05S

FEATURES

- Die-casting aluminium body + clear / frosted glass
- With unique designed & rotated sensor
- LED: SMD2835
- 220-240V, 50Hz
- IP44

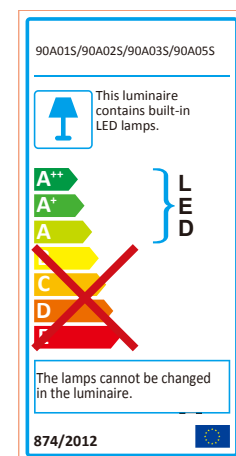

Item.	Watt	Lumen	LED Type	CRI	PF	CCT
90A01S	10W	800LM	SMD2835	>80Ra	≥98%	3000-6500K
90A02S	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K
90A03S	30W	2400LM	SMD2835	>80Ra	≥98%	3000-6500K
90A05S	50W	4000LM	SMD2835	>80Ra	≥98%	3000-6500K

90C WITH TRIPOD

FEATURES

- Die-casting aluminium body + clear / frosted glass
- With umbrella - type tripod
- With 3m cable + plug.
- LED: SMD2835
- 110 - 130V / 220 - 240V, 50/60Hz
- IP65



Item.	Watt	Lumen	LED Type	CRI	PF	CCT
90C01	10W	800LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C02	20W	1500LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C03	30W	2400LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C05	50W	4000LM	SMD2835	>80Ra	≥ 98%	3000-6500K

Item.	Watt	Lumen	LED Type	CRI	PF	CCT
90C01-2	2x10W	1600LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C02-2	2x20W	3000LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C03-2	2x30W	4800LM	SMD2835	>80Ra	≥ 98%	3000-6500K
90C05-2	2x50W	8000LM	SMD2835	>80Ra	≥ 98%	3000-6500K


96A RECHARGEABLE SERIES

FEATURES

- Die-casting aluminium body + tempered glass
- With foldable & flexible portable stand
- LED: SMD2835
- With super touch switch + LED battery indicator
- With USB charging cable
- IP54




Replaceable battery

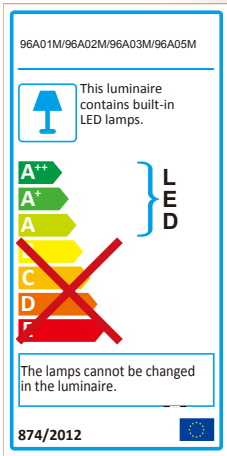

super touch switch
LED battery indicator



USB charging port

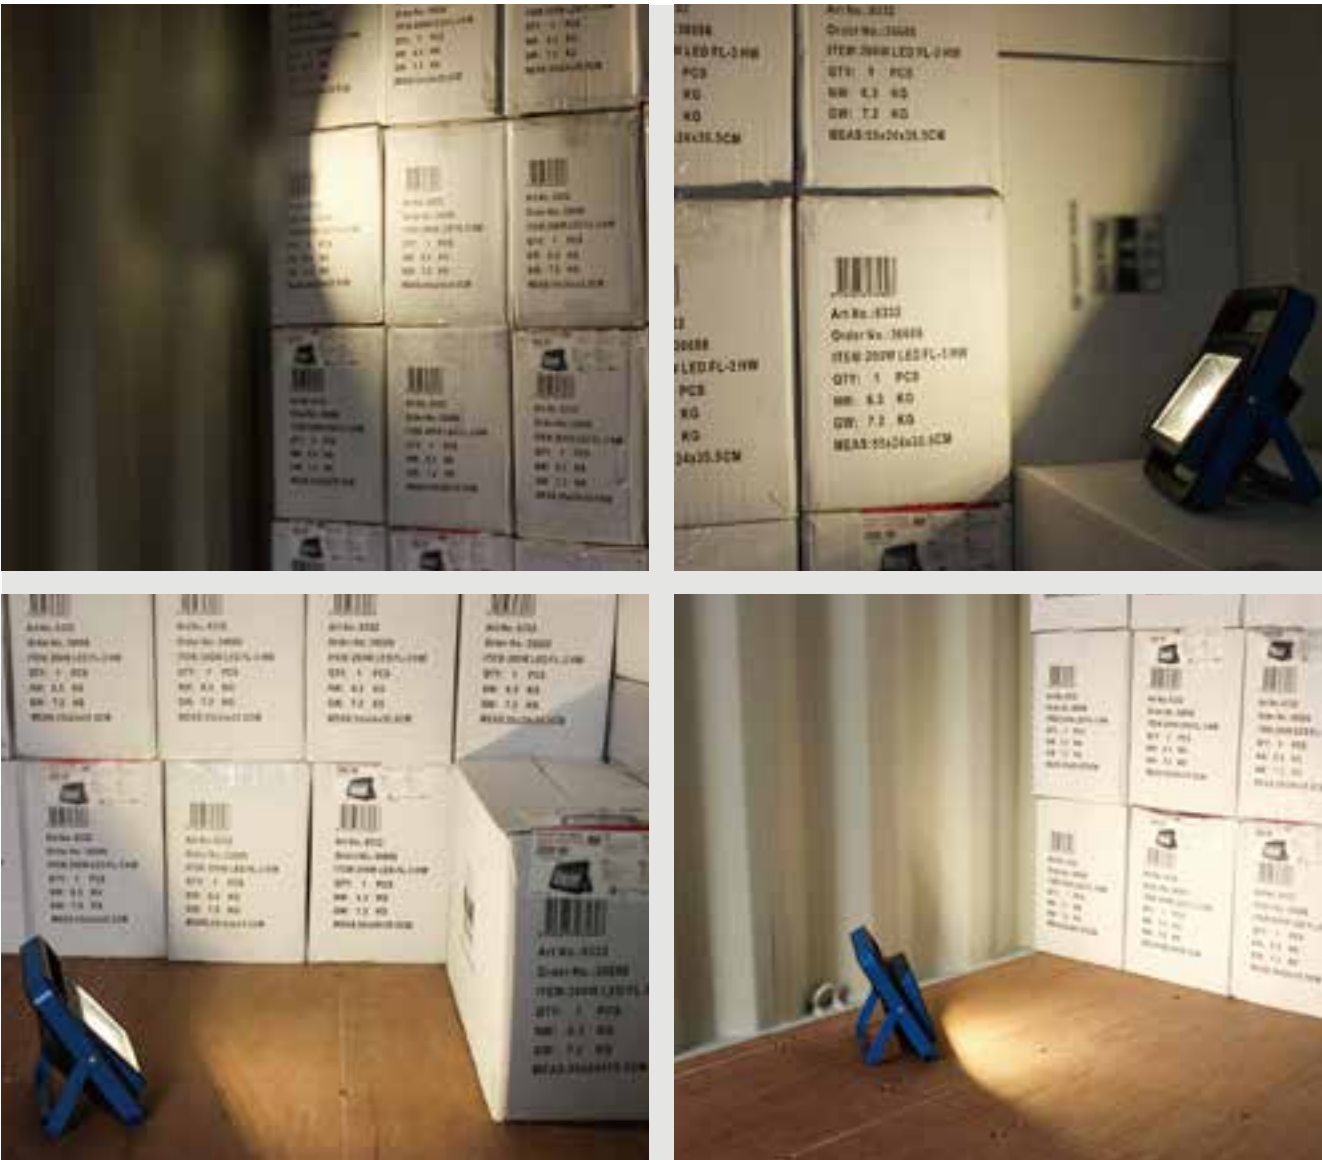

Container loading



Item.	Watt	Lumen	LED Type	CRI	IP	CCT
96A01	10W	700LM	SMD2835	>80Ra	54	3000-6500K
96A02	20W	1400LM	SMD2835	>80Ra	54	3000-6500K
96A03	30W	2100LM	SMD2835	>80Ra	54	3000-6500K
96A05	50W	3500LM	SMD2835	>80Ra	54	3000-6500K

96A RECHARGEABLE SERIES

FEATURES

- Die-casting aluminium body + clear glass
- With foldable portable stand
- LED: SMD2835
- With li-battery inside
- **With blue-tooth function**



Replaceable battery



Integrated magnet



Bluetooth / loudspeaker



Item No.: 90B02-BT (20W)

Item No.: 90B03-BT (30W)



LED FIXTURES

FEATURES

- Housing: aluminium extrusion + Die cast aluminium
- Powder coated(RAL7016)
- Diffuser: Opal polycarbonate(PC)
- Clips: Stainless Steel
- Fast connector : LCH-1108.66
- LED-SYSTEM AND CONTROL GEAR
- LG LED 5630
- Osram Driver
- Color temperature: 4000-5000K
- 50000h lifetime(L80)
- Ra>85



IK08



IP66



Item No.	Watt	System Efficiency(4000k)	Luminous flux(4000k)
Cruiser-1200-28w/840	28W	122lm/w	3400lm
Cruiser-1200-58w/840	58W	122lm/w	7076lm
Cruiser-1500-52w/840	52W	113lm/w	5876lm
Cruiser-1500-77w/840	77W	113lm/w	8701lm


PORTABLE WORKLIGHT SERIES

FEATURES

Item No.: HD1001A

- HIGH** 150 Lumens
- SOS** 150 Lumens
- HALF** 75 Lumens
- SENSOR** 150 Lumens

4 LIGHT MODES

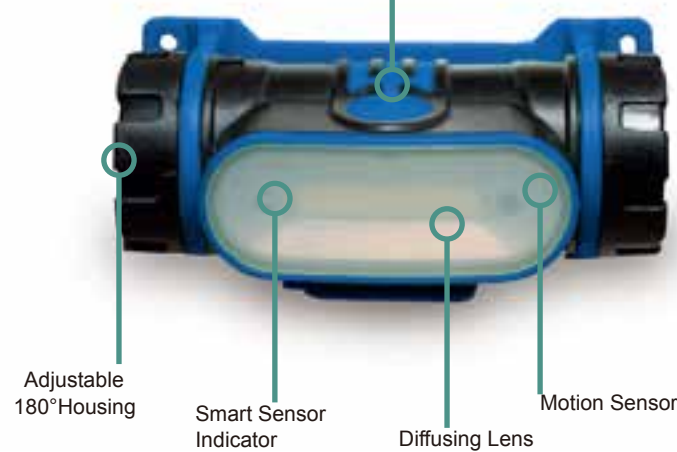

8 HR
MAX
RUN TIME

IP 44
WATER
RESISTANT




2 Ways To Turn ON+OFF

Manually using switch
or
Intelligent motion sensor.
Touchless wave control.
Ideal when hands are
dirty, wearing gloves,
fishing or climbing.

FEATURES

Item No.:F310B-11

- ABS with rubber painting
- LED: 3W / COB + 1pc LED at the top as torch
- Lumen: 210lm
- Battery: li-battery
- Charging time: 5hours
- Discharging time: 3hours

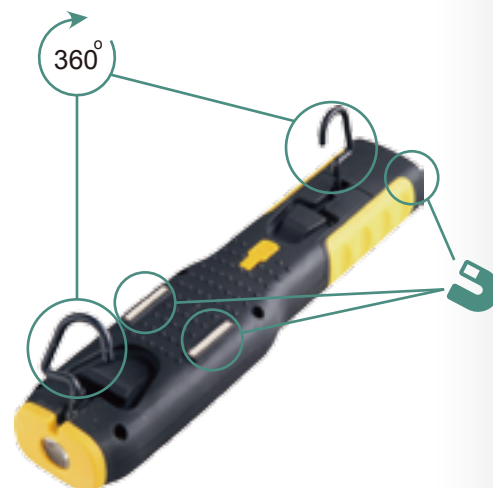

FEATURES

- LED: COB (2W / 3W / 5W) + 1pc of LED at top
- Battery: Li-ion battery
- 3 Models: COB high - COB low - top LED ON - OFF
- With magnetic in the bottom and hook in the back
- With flexible hand
- With USB charging port.
- With 5V 1A adaptor only.



Integrated magnet



Replaceable battery




Item No.: 6846 (5W)



Item No.: 6847 (3W)



Item No.: 6848 (2W)

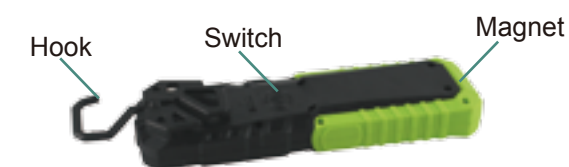

77A SERIES

FEATURES

- Die-casting aluminium body + clear / frosted glass
- LED: SMD2835
- 220-240V, 50Hz
- IP65



Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	Dimensions(LxHxD)
77A01	10W	750LM	SMD2835	>80Ra	≥98%	3000-6500K	114x105x52mm
77A02	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K	180x170x62mm
77A03	30W	2250LM	SMD2835	>80Ra	≥98%	3000-6500K	222x200x68mm
77A05	50W	3750LM	SMD2835	>80Ra	≥98%	3000-6500K	286x240x88mm
77A10	100W	7500LM	SMD2835	>80Ra	≥98%	3000-6500K	382x320x118mm
77A15	150W	11250LM	SMD2835	>80Ra	≥98%	3000-6500K	425x310x150mm
77A20	200W	15000LM	SMD2835	>80Ra	≥98%	3000-6500K	525x330x135mm
77A30	300W	23500LM	SMD2835	>80Ra	≥98%	3000-6500K	600x325x160mm
77A40	400W	30000LM	SMD2835	>80Ra	≥98%	3000-6500K	660x325x160mm

77B SERIES WITH PORTABLE

FEATURES

- Die-casting aluminium body + clear glass
- With portable stand
- With 1.5m H05RN-F 3G x 1.00mm cable + VDE plug.
- LED: SMD2835
- 220-240V, 50Hz
- IP65



Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	Dimensions(LxHxD)
77B01	10W	750LM	SMD2835	>80Ra	≥98%	3000-6500K	200x260x160mm
77B02	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K	235x340x190mm
77B03	30W	2250LM	SMD2835	>80Ra	≥98%	3000-6500K	300x360x240mm
77B05	50W	3750LM	SMD2835	>80Ra	≥98%	3000-6500K	360x370x315mm
77B10	100W	7500LM	SMD2835	>80Ra	≥98%	3000-6500K	480x445x385mm
77B15	150W	11250LM	SMD2835	>80Ra	≥98%	3000-6500K	530x480x390mm
77B20	200W	15000LM	SMD2835	>80Ra	≥98%	3000-6500K	590x480x390mm

77C SERIES WITH TRIPOD

FEATURES

- Die-casting aluminium body + clear glass
- With portable stand
- With 1.5m H05RN-F 3G x 1.00mm cable + VDE plug.
- LED: SMD2835
- 220-240V, 50Hz
- IP65



Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	IP
77C01	10W	750LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C02	20W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C03	30W	2250LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C05	50W	3750LM	SMD2835	>80Ra	≥98%	3000-6500K	65

Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	IP
77C01-2	2x10W	1500LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C02-2	2x20W	3000LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C03-2	2x30W	4500LM	SMD2835	>80Ra	≥98%	3000-6500K	65
77C05-2	2x50W	7500LM	SMD2835	>80Ra	≥98%	3000-6500K	65

86A SERIES

FEATURES

- Die-casting aluminium body + clear glass
- LED: COB
- 220-240V, 50Hz
- IP65



Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	Dimensions(LxHxD)
86A01	10W	700LM	COB33MIL	>70Ra	≥50%	3000-6500K	115x115x100mm
86A02	20W	1400LM	COB33MIL	>70Ra	≥85%	3000-6500K	180x170x115mm
86A03	30W	2100LM	COB33MIL	>70Ra	≥90%	3000-6500K	225x208x130mm
86A05	50W	3500LM	COB33MIL	>70Ra	≥90%	3000-6500K	286x286x155mm

86S SERIES

FEATURES

- Die-casting aluminium body + clear glass
- With infrared sensor.
- LED: COB
- 220-240V, 50Hz
- IP65



Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	Dimensions(LxHxD)
86S01	10W	700LM	COB33MIL	>70Ra	≥50%	3000-6500K	115x175x100mm
86S02	20W	1400LM	COB33MIL	>70Ra	≥85%	3000-6500K	180x215x115mm
86S03	30W	2100LM	COB33MIL	>70Ra	≥90%	3000-6500K	225x270x130mm
86S05	50W	3500LM	COB33MIL	>70Ra	≥90%	3000-6500K	286x290x155mm

86H SERIES

FEATURES

- Die-casting aluminium body + clear glass
- LED: COB
- 220-240V, 50Hz
- IP65




Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	Dimensions(LxHxD)
86H01-U	10W	700LM	COB33MIL	>70Ra	≥50%	3000-6500K	200x260x160mm
86H02-U	20W	1400LM	COB33MIL	>70Ra	≥85%	3000-6500K	235x340x190mm
86H03-U	30W	2100LM	COB33MIL	>70Ra	≥90%	3000-6500K	360x370x315mm
86H05-U	50W	3500LM	COB33MIL	>70Ra	≥90%	3000-6500K	480x445x385mm

86C SERIES

FEATURES

- Die-casting aluminium body + clear glass
- With umbrella - type tripod
- With 3m H05RN-F 3G x 1.00mm cable + VDE plug.
- LED: COB
- 220-240V, 50Hz
- IP65

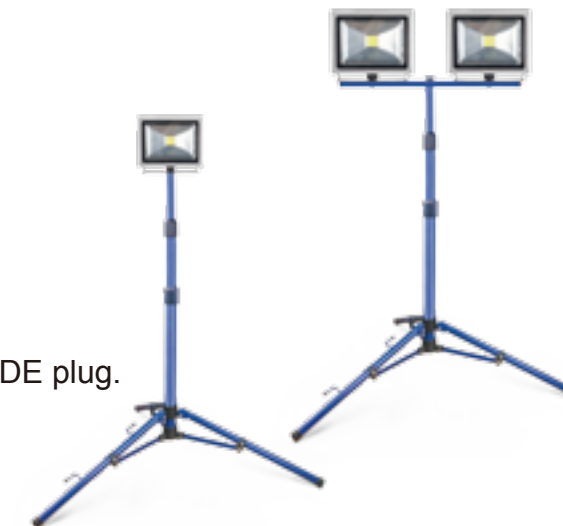

Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	IP
86C01	10W	700LM	COB33MIL	>70Ra	≥50%	3000-6500K	65
86C02	20W	1400LM	COB33MIL	>70Ra	≥85%	3000-6500K	65
86C03	30W	2100LM	COB33MIL	>70Ra	≥90%	3000-6500K	65
86C05	50W	3500LM	COB33MIL	>70Ra	≥90%	3000-6500K	65

Item No.	Watt	Lumen	LED Type	CRI	PF	CCT	IP
86C01-2	2x10W	1400LM	COB33MIL	>70Ra	≥50%	3000-6500K	65
86C02-2	2x20W	2800LM	COB33MIL	>70Ra	≥85%	3000-6500K	65
86C03-2	2x30W	4200LM	COB33MIL	>70Ra	≥90%	3000-6500K	65
86C05-2	2x50W	7000LM	COB33MIL	>70Ra	≥90%	3000-6500K	65

SPARE PART



1165.68-I



1108.66-I



1312.68



1108.66-T



1165.68-T



1311.68



Item No.: 6037 (1.5m)
Item No.: 6108 (2m)

Remarks

[illegible]