

慈溪市乐诺照明科技有限公司

CIXI LEONLUX TECHNOLOGY CO., LTD

慈溪市乐诺照明科技有限公司

CIXI LEONLUX TECHNOLOGY CO., LTD

ADD: NO.36 Xujia,Yiyuan Village, Zonghan Street, Cixi 315300, China

TEL: +86 159 6890 9490

FAX: +86 574 6321 0667

E-mail: manfred@leonlux.net lemon@leonlux.net

<http://www.leonlux.net>

2021-2022

leonlux®

BSCI

ISO9001

TEL: +86 159 6890 9490

FAX: +86 574 6321 0667

E-mail: manfred@leonlux.net

<http://www.leonlux.net>

ADD: NO.36 Xujia,Yiyuan Village, Zonghan Street, Cixi 315300, China

COMPANY PROFILE



Welcome to Cixi Leonlux Technology Co., Ltd

Leonlux is a leading manufacturer of interior and exterior LED lighting products, and has earned high reputation for supplying quality product at competitive prices. Continual product development and updates in legislation allows Leonlux to be at the forefrot by offering the latest technology, particularly in LED lighting, creating a recognised and trusted brand that is now being supplied around the world. Almost of products have got the GS/LVD/EMC/RoHS/PAHs/REACH from TUV SUD. And we also apply for the ErP(874/2012) under the new policy of Europe. FCC/ETL/cETL/LM-79 are available for North America. Welcome to joining us! Best regards! Managing Director: Leon

TABLE OF CONTENTS

1 01-06	360°LED ECONOMICAL WORK LIGHT/ TOWER LIGHT	
2 07-12	360°LED STAND WORK LIGHT/ TOWER LIGHT 360° LED STAND WORK LIGHT/ TOWER LIGHT WITH BATTERY	
3 13-14	LED COMPACT AREA LIGHT LED COMPACT AREA LIGHT WITH BATTERY	
4 15-16	IK10 LED WORKLIGHT / TRIPLE BRIGHTNESS	
5 17-18	IK10 LED WORKLIGHT / TWIN BRIGHTNESS IK10 LED WORKLIGHT WITH BATTERY / TWIN BRIGHTNESS	
6 19-22	IK10 LED WORKLIGHT / SINGLE BRIGHTNESS IK10 RECHARGEABLE LED WORKLIGHT / SINGLE BRIGHTNESS	
7 23-24	ECONOMICAL RECHARGEABLE LED WORKLIGHT	
8 25-26	ISPOT WORKLIGHT SERIES	
9 27-28	RECHARGEABLE LED HAND LAMPLUXPREMIUM LED RECHARGEABLE SENSOR HEADLAMP	
10 29-30	Building Telescopic Tripod	




With Driver

Flickering Free

High Output Lumen



360° LED ECONOMICAL WORK LIGHT/ TOWER LIGHT

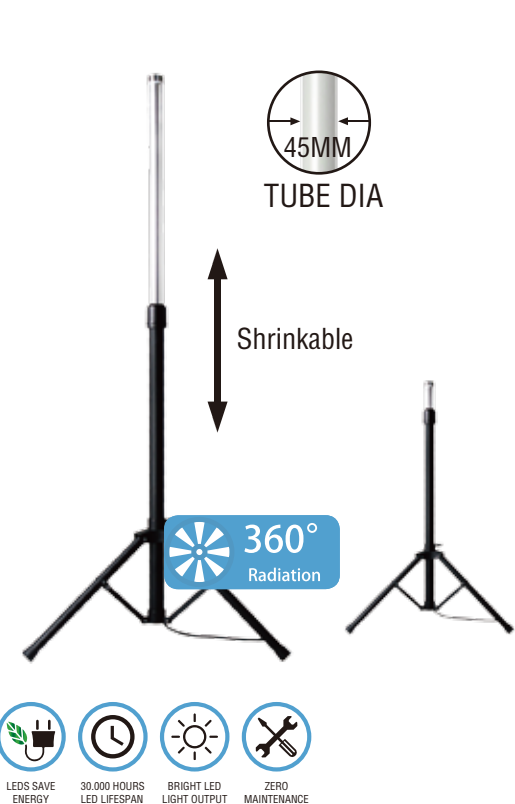

NEW

- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.



Model	35B03	35B04
Power	60W	80W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luninous Flux	6600lm / 7500lm	8800lm / 10000lm
Dimensions In Use	Ø 970x2300mm	Ø 970x2900mm
Transport Dimensions	Ø 160x1300mm	Ø 160x1600mm
Nominal input voltage min.-max.	220-240V	
Protection class	II	
Cable designation	H07RN-F 2x1.50	
Energy efficiency class		
Degree of protection (IP)	IP69K	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	160x36x36cm	190x36x36cm

360° LED ECONOMICAL WORK LIGHT/ TOWER LIGHT



- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion. .
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.

NEW



Model	35A03	35A04
Power	60W	80W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luninous Flux	6600lm / 7500lm	8800lm / 10000lm
Dimensions In Use	Ø 500x1300mm	Ø 500x1600mm
Transport Dimensions	Ø 160x1300mm	Ø 160x1600mm
Nominal input voltage min.-max.	220-240V	
Protection class	II	
Cable designation	H07RN-F 2x1.50	
Energy efficiency class		
Degree of protection (IP)	IP69K	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	160x36x36cm	190x36x36cm



360° LED ECONOMICAL WORK LIGHT/ TOWER LIGHT

NEW



TUBE DIA

- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.



Model	36A03	36A04
Power	90W	120W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	10800lm	14500lm
Dimensions In Use	Ø 500x1300mm	Ø 500x1500mm
Transport Dimensions	Ø 160x1300mm	Ø 160x1600mm
Nominal input voltage min.-max.	220-240V	
Protection class	II	
Cable designation	H07RN-F 2x1.50	
Energy efficiency class		
Degree of protection (IP)	IP69K	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	160x36x36cm	190x36x36cm



360° LED ECONOMICAL WORK LIGHT/ TOWER LIGHT



TUBE DIA

- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.



NEW

Model	37A03	37A04
Power	120W	160W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	14500lm	19000lm
Dimensions In Use	Ø 500x1300mm	Ø 500x1600mm
Transport Dimensions	Ø 160x1300mm	Ø 160x1600mm
Nominal input voltage min.-max.	220-240V	
Protection class	II	
Cable designation	H07RN-F 2x1.50	
Energy efficiency class		
Degree of protection (IP)	IP69K	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	160x36x36cm	190x36x36cm



360°LED STAND WORK LIGHT/ TOWER LIGHT



360° LED STAND WORK LIGHT/ TOWER LIGHT



- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- With fold-out mounting bracket for positioning or mounting on tripods. Robust plastic housing
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.
- With ON/OFF switch.

Outlet Socket



Socket Optional

Bluetooth/
loudspeaker

USB output



Model	30A01A	30A02A
Power	40W+10W	65W+10W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	3700lm+900lm	6500lm+900lm
Dimensions In Use	170x186x1000mm	170x186x1240mm
Transport Dimensions	Ø 740x1620mm	Ø 740x2100mm
Nominal input voltage min.-max.	220-240V	
Protection class	I	
Number of socket outlets	2	
Cable designation	H07RN-F 3G1,5	
Energy efficiency class		
Degree of protection (IP)	IP54	
Packing datas	2pcs/CTN	2pcs/CTN
Carton size	104x19x40cm	129x19x40cm

360° LED STAND WORK LIGHT/ TOWER LIGHT



- Excellent all-round lighting thanks to 360°beam angle, anti-glare and wide diffusion.
- Switch with light functions 100 – 50 %.
- With fold-out mounting bracket for positioning or mounting ontripods. Robust plastic housing
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.
- With ON/OFF switch.

Outlet Socket



Model	31C03	31C04
Power	90W	130W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luninous Flux	8100lm	13000lm
Dimensions In Use	170x186x1320mm	170x186x1560mm
Transport Dimensions	Ø 740x1340mm	Ø 740x1580mm
Nominal input voltage min.-max.	220–240V	
Protection class	I	
Number of socket outlets	2	
Cable designation	H07RN–F 3G1,5	
Energy efficiency class		
Degree of protection (IP)	IP54	
Packing datas	2pcs/CTN	2pcs/CTN
Carton size	137x19x40cm	160x19x40cm



- Excellent all-round lighting thanks to 360°beam angle, anti-glare and wide diffusion.
- With fold-out mounting bracket for positioning or mounting ontripods. Robust plastic housing
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.




Model	33A03	33A04
Power	90W	130W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luninous Flux	8100lm	13000lm
Dimensions In Use	170x186x1250mm	170x186x1480mm
Transport Dimensions	Ø 740x1290mm	Ø 740x2100mm
Nominal input voltage min.-max.	220–240V	
Protection class	I	
Cable designation	H07RN–F 3G1,5	
Energy efficiency class		
Degree of protection (IP)	IP69K	
Packing datas	4pcs/CTN	2pcs/CTN
Carton size	129x36x40cm	152x19x40cm





360° LED STAND WORK LIGHT/ TOWER LIGHT WITH BATTERY



Always bright working light even in places without power supply.
Integrated Li-Ion battery.

- With integrated overcharge and deep discharge protection and battery status indicator.
- Battery and charge indicator with low battery warning.
- 2 switching levels: 100 %, 50 % light for longer light duration.
- Stainless dim function for 10%to 100%light.
- With 1.5m charging cable.
- Solid, modern aluminium housing.
- Floodlight can be continuously swivelled and locked with one hand by means of a quick release fastener.
- Sturdy tubular steel frame with plastic protective corners and ergonomically shaped plastic carrying handle

Model	30R01D	30R02D
Power	20W+10W	40W+10W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	1600lm+800lm	3200lm+800lm
Dimensions In Use	170x186x1000mm	170x186x1240mm
Transport Dimensions	Ø 740x1620mm	Ø 740x2100mm
Protection class	III	
Attery voltage	14.8V	14.8V
Battery capacity	2.2Ah	4.4Ah
Degree of protection (IP)	IP54	
Packing datas	2pcs/CTN	2pcs/CTN
Carton size	104x19x40cm	129x19x40cm

Hybrid Version



Always bright working light even in places without power supply.
Integrated Li-Ion battery.

- With integrated overcharge and deep discharge protection and battery status indicator.
- Battery and charge indicator with low battery warning.
- 2 switching levels: 100 %, 50 % light for longer light duration.
- Stainless dim function for 10%to 100%light.
- With 1.5m charging cable.
- Solid, modern aluminium housing.
- Floodlight can be continuously swivelled and locked with one hand by means of a quick release fastener.
- Sturdy tubular steel frame with plastic protective corners and ergonomically shaped plastic carrying handle

Model	31R02	31R03
Power	40W	60W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	800lm/1600lm	1600lm/3200lm
Dimensions In Use	170x186x1320mm	170x186x1560mm
Transport Dimensions	Ø 740x1340mm	Ø 740x1580mm
Protection class	III	
Attery voltage	14.8V	14.8V
Battery capacity	4.4Ah	6.6Ah
Degree of protection (IP)	IP54	
Packing datas	2pcs/CTN	2pcs/CTN
Carton size	106x19x40cm	137x19x40cm



Powerbank Function
Charge for your device



IPAD



Iphone



Battery version
With integrated Li-Ion battery, battery status display, overcharge and deep discharge protection, 2 switching levels: 100 %, 50 % for longer light duration. Always bright working light even in places without a power connection

LED COMPACT AREA LIGHT



- For indoors and outdoors use, IP54, IK10.
- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
 - The light can be used when placed upright, hanging or mounted on a stand.
 - Robust, break and impact resistant plastic casing.
 - Splash-proof socket with self-closing cover.
 - With ON/OFF switch.

Outlet Socket




Socket Optional



Bluetooth/loudspeaker



USB output



Model	32A20	32A20A
Power	20W	20W+10W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	1600lm	2400lm
Dimensions In Use	Ø 230x355mm	Ø 248x355mm
Nominal input voltage min.-max.	220-240V	
Protection class	I	
Number of socket outlets	2	1
Cable designation	H07RN-F 3G1,5	
Energy efficiency class		
Degree of protection (IP)	IP54	
Packing datas	6pcs/CTN	6pcs/CTN
Carton size	53x40x40cm	66x44x40cm

LED COMPACT AREA LIGHT WITH BATTERY



- Excellent all-round lighting thanks to 360° beam angle, anti-glare and wide diffusion.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Integrated lithium-ion battery with charging indicator.
- With ON/OFF switch.



Model	32R20	32R20A
Power	20W	20W+10W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	1500lm	2500lm
Dimensions In Use	Ø 230x355mm	Ø 248x355mm
Protection class	III	
Attery voltage	14.8V	14.8V
Battery capacity	2.2Ah	2.2Ah
Degree of protection (IP)	IP54	
Packing datas	6pcs/CTN	6pcs/CTN
Carton size	53x40x40cm	66x44x40cm




Battery version
With integrated Li-Ion battery, battery status display, overcharge and deep discharge protection, 2 switching levels: 100 %, 50 % for longer light duration. Always bright working light even in places without a power connection

IK08 LED WORKLIGHT



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber edge protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.

Outlet Socket



Model	92A08
Power	80W
Color Temperature	3000K/4000K/6500K
Luminous Flux	6400lm
Dimensions In Use	300x90x360mm
Nominal input voltage min.-max.	220-240V
Protection class	I
Number of socket outlets	2
Cable designation	H07RN-F 3G1,5
Energy efficiency class	A G E
Degree of protection (IP)	IP54
Packing datas	4pcs/CTN
Carton size	63x32.5x39.5cm



IK08 LED WORKLIGHT / TRIPLE BRIGHTNESS



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber edge protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.

Outlet Socket




Model	92A08A
Power	80W+2x30W
Color Temperature	3000K/4000K/6500K
Luminous Flux	11000lm
Dimensions In Use	375x120x360mm
Nominal input voltage min.-max.	220-240V
Protection class	I
Number of socket outlets	2
Cable designation	H07RN-F 3G1,5
Energy efficiency class	A G E
Degree of protection (IP)	IP54
Packing datas	3pcs/CTN
Carton size	54.5x40.5x39.5cm





IK08 LED WORKLIGHT / TWIN BRIGHTNESS



- Excellent all-round lighting thanks to 270° beam angle, anti-glare and wide diffusion.
- Switch with light functions 100 – 50 %.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Splash-proof socket with self-closing cover.
- With ON/OFF switch.
- Suitable for mounting on 6037 and 6038 tripods.

Outlet Socket



Socket Optional



Bluetooth/ loudspeaker




USB output



Model	99A20	99A40
Power	2x20W	2x40W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	3600lm	7200lm
Dimensions In Use	180x130x255mm	225x128x330mm
Nominal input voltage min.-max.	220–240V	
Protection class	I	
Number of socket outlets	1	2
Cable designation	H07RN-F 3G1,5	
Energy efficiency class	A++ E	
Degree of protection (IP)	IP54	
Packing datas	6pcs/CTN	4pcs/CTN
Carton size	61x42x32cm	63x29x38.5cm

IK08 LED WORKLIGHT WITH BATTERY / TWIN BRIGHTNESS



- Excellent all-round lighting thanks to 270° beam angle, anti-glare and wide diffusion.
- Stainless dim function for 10%to 100%light.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Integrated lithium-ion battery with charging indicator.
- With ON/OFF switch.
- Suitable for mounting on 6037 and 6038 tripods.




Model	99R10	99R20
Power	2x10W	2x20W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	1500lm	2800lm
Dimensions In Use	180x130x255mm	225x128x330mm
Protection class	III	
Attery voltage	3.7V	14.8V
Battery capacity	8.8Ah	4.4Ah
Degree of protection (IP)	IP54	
Packing datas	6pcs/CTN	4pcs/CTN
Carton size	61x26x31cm	58.5x25.5x37cm





IK08 LED WORKLIGHT / SINGLE BRIGHTNESS



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber edge protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.

Outlet Socket



Socket Optional




Bluetooth/loudspeaker



USB output

Model	98A02
Power	20W
Color Temperature	3000K/4000K/6500K
Luminous Flux	1600lm
Dimensions In Use	220x95x235mm
Nominal input voltage min.-max.	220-240 V
Protection class	I
Number of socket outlets	2
Cable designation	H07RN-F 3G1,5
Energy efficiency class	A G E
Degree of protection (IP)	IP54
Packing datas	6pcs/CTN
Carton size	50x41x27cm



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.



Model	98A03	98A05
Power	30W	50W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	2400lm	4000lm
Dimensions In Use	230x100x295mm	265x110x345mm
Nominal input voltage min.-max.	220-240V	
Protection class	I	
Number of socket outlets	2	
Cable designation	H07RN-F 3G1,5	
Energy efficiency class	A G E	
Degree of protection (IP)	IP54	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	63x26.5x33cm	63x29.5x38.5cm






IK08 LED WORKLIGHT / SINGLE BRIGHTNESS

AC+DC function
Emergency lighting while power off



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.




Outlet Socket



Model	98A03-SE	98A05-SE
Power	30W	50W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	2400lm	4000lm
Dimensions In Use	230x100x295mm	265x110x345mm
Nominal input voltage min.-max.	220-240V	
Protection class	I/III	
Number of socket outlets	2	
Battery type	Built-in battery pack	
Battery capacity	4.4Ah	
Cable designation	H07RN-F 3G1,5	
Energy efficiency class		
Degree of protection (IP)	IP54	
Packing datas	4pcs/CTN	4pcs/CTN
Carton size	63x26.5x33cm	63x29.5x38.5cm

IK08 RECHARGEABLE LED WORKLIGHT / SINGLE BRIGHTNESS



- For indoor and outdoor use, IP 54.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Stainless dim function for 10%to 100%light.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber protection.
 - With illuminated ON/OFF switch.
 - Suitable for mounting on 6037 and 6038 tripods.

Model	98R02	98R03	98R03
Power	20W	30W	50W
Color Temperature	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
Luminous Flux	1500lm	2100lm	3500lm
Dimensions In Use	220x90x230mm	230x105x295mm	265x110x345mm
Protection class	III		
Attery voltage	7.4V	14.8V	14.8V
Battery capacity	4.4Ah	4.4Ah	6.6Ah
Degree of protection (IP)	IP54		
Packing datas	6pcs/CTN	4pcs/CTN	4pcs/CTN
Carton size	68.5x26x27cm	63x26.5x33cm	63x29.5x38.5cm






Model	96A01M	96A02M
Power	10W	20W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	700lm	1400lm
Dimensions In Use	143x45x170mm	180x65x195mm
Protection class	III	
Attery voltage	3.7V	3.7V
Battery capacity	4.4Ah	8.8Ah
Degree of protection (IP)	IP54	
Packing datas	12pcs/CTN	12pcs/CTN
Carton size	36x33x20m	58x30.5x23cm

ECONOMICAL RECHARGEABLE LED WORKLIGHT



- Excellent all-round lighting thanks to 120° beam angle, anti-glare and wide diffusion.
- Switch with light functions 100 – 10 %.
- The light can be used when placed upright, hanging or mounted on a stand.
- Robust, break and impact resistant plastic casing.
- Integrated lithium-ion battery with charging indicator.
- With ON/OFF switch.
- Suitable for mounting on 6037 and 6038 tripods.



ISPOT WORKLIGHT SERIES



- For indoor and outdoor use, IP 65.
- Pleasant, glare-free working light and special light scattering for extensive illumination.
 - Light and still very robust.
 - Low heat generation, no danger of injury.
 - SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
 - Fracture- and impact-proof plastic housing with rubber edge protection.
 - Suitable for mounting on 6037 and 6038 tripods.



Model	90B02	90B03
Power	20W	30W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	1600lm	2400lm
Dimensions In Use	170x35x192mm	195x40x220mm
Nominal input voltage min.-max.	220-240V	
Protection class	I	
Number of socket outlets	NO	
Cable designation	H05RN-F 3G1,0	
Energy efficiency class		
Degree of protection (IP)	IP65	
Packing datas	16pcs/CTN	8pcs/CTN
Carton size	54.5x21.5x38.5m	48x37x22cm




Model	90B05	90B06
Power	50W	60W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	4000lm	4800lm
Dimensions In Use	255x40x285mm	307x40x343mm
Nominal input voltage min.-max.	220-240V	
Protection class	I	
Number of socket outlets	NO	
Cable designation	H05RN-F 3G1,0	
Energy efficiency class		
Degree of protection (IP)	IP65	
Packing datas	8pcs/CTN	4pcs/CTN
Carton size	57x29x32.5m	33x30x38cm

Rechargeable LED Hand Lamp




- With super-bright COB LED at the front.
- Additional switching step for 1 SMD LED in the lamp head.
- Working mode: High – Low – OFF – Top
- Rubberised for improved impact resistance and optimal grip
- Adjustable up to +/- 60° with integrated magnet.
- 2 magnets at the back and fold-out hook for flexible use.
- Integrated Li-Ion battery with charging indicator.
- USB charging interface, including USB charging cable.



Model	6848	6847	6846
Power	2W	3W	5W
Color Temperature	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
Luminous Flux	120lm	240lm	420lm
Dimensions In Use	48x30x116mm	52x32x163mm	60x32x190mm
Protection class	III		
Attery voltage	3.7V	3.7V	3.7V
Battery capacity	1.0Ah	2.2Ah	4.4Ah
Degree of protection (IP)	IP54		
Packing datas	40pcs/CTN	40pcs/CTN	24pcs/CTN
Carton size	29x26x20cm	35x29x20cm	41.5X14.5X31.5cm



LuxPremium LED Rechargeable Sensor Headlamp

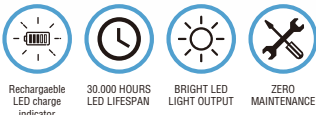

- With extremely bright LED.
- Two operating modes: manual and infrared sensor.
- Infrared sensor for hands-free operation.
- Working mode: High – Low.
- Tail light red, red flashing.
- Infinitely focus from laminary light nearby to high beam focused light.
- Battery pack on the back of the head for good balance.
- Exchangeable lithium-ion battery with charging indicator.
- Focus angle can be adjusted.
- USB charging cable included.

Model	HD1001A
Power	2W
Color Temperature	3000K/4000K/6000K
Luninous Flux	150lm
Dimensions In Use	25x80mm
Protection class	III
Attery voltage	3.7V
Battery capacity	2.2Ah
Degree of protection (IP)	IP54
Packing datas	48pcs/CTN
Carton size	44.5x29.5x34cm

Building Telescopic Tripod



- Hinged, extremely stable feet with ground mounting plates.
- Heavy-duty, stable and robust design.
 - Strong stand pipes made of square steel profile, galvanically zinc-plated.
 - Adjustable at any height up to max. 1.5 m.
 - Solid attachment with anchor screws, alternatively with included handles.

Model	6037
Min. height adjustable	67cm
Max. height adjustable	150cm



Building Telescopic Tripod



- Hinged, extremely stable feet with ground mounting plates.
- Heavy-duty, stable and robust design.
 - Strong stand pipes made of square steel profile, galvanically zinc-plated.
 - Adjustable at any height up to max. 3.0 m.
 - Solid attachment with anchor screws, alternatively with included handles.

Model	6107
Min. height adjustable	136cm
Max. height adjustable	300cm

